


# Haiku L Series Fans

## TECHNICAL SPECIFICATIONS

Haiku's signature design elements, energy efficiency, and effectiveness at a more accessible price point.

### THE CEILING FAN, REINVENTED

- **Airfoils** — Hybrid resin construction available in black or white finishes
- **Mounting** — Universal mount for flat or sloped ceilings 8 feet (2.4 meters) and taller
- **Integrated LED Light** — Settings include on/off, Sleep mode, and 16 dimmable light levels; life expectancy of 50,000 hours
- **Fan Settings** — Whoosh® mode, Sleep mode, timer, and on/off
- **Motor** — EC motor with digital inverter drive
- **Controls** — Handheld remote control, Haiku Wall Control (optional), or Amazon Echo (with addition of Wi-Fi module)
- **Environment** — Indoor or covered outdoor use<sup>2</sup>
- **Accessories** — 0–10 V Module and Haiku Wall Control (enables SenseME® Technology<sup>1</sup> features, including motion sensing and Smart Mode settings). See respective spec sheet for details.

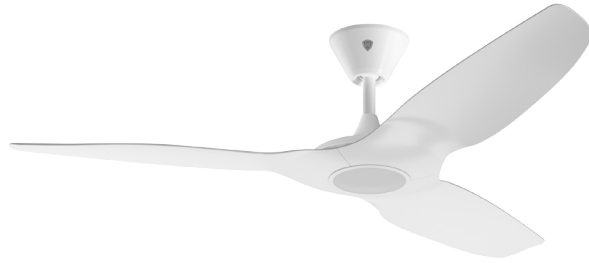

Handheld Remote



Black Finish with Smoky Lens

#### Airfoil Finishes



Black



White

### Technical Specifications

<b>Model number<sup>3</sup></b>	120 V: L3127-X5-XX-XX-00-E	240 V: L3127-X6-XX-XX-00-E
<b>Operating voltage</b>	100–120 VAC, 1 Φ, 50/60 Hz	200–240 VAC, 1 Φ, 50/60 Hz
<b>Amps (min/max)</b>	0.037/0.42 A	0.033/0.16 A
<b>Fan watts (min/max)</b>	2.5/17.7 W	4.1/18.6 W
<b>Light watts (max)</b>	20 W	
<b>Light output (max)</b>	988 lumens	
<b>Light color temperature</b>	2700 K	
<b>Light color rendering index</b>	82 CRI	
<b>Standard fan heights (A)</b>	11.4 in. (289 mm)	16.4 in. (417 mm)
<b>Optional extended fan heights (A)<sup>4</sup></b>	28.4 in. (721 mm)	41.1 in. (1044 mm)
	57.1 in. (1450 mm)	69.1 in. (1755 mm)
<b>Weight<sup>5</sup></b>	11 lb (5 kg)	
<b>Fan speed (min/max)</b>	7 speeds (60/182 RPM)	
<b>Sound level at max speed<sup>6</sup></b>	< 35 dBA	

<sup>1</sup> SenseME Technology and the Haiku Home app are supported by Android<sup>®</sup> and iOS<sup>®</sup>. The Haiku Wall Control must be purchased to enable SenseME Technology.


<sup>2</sup> 100–125 V model certified by Intertek/ETL to UL 507 damp rated applications. 200–240 V model certified by TÜV SÜD to the CB scheme including T mark for Tropical applications.

<sup>3</sup> "X" indicates a placeholder number, which varies depending on finish options, where the fan is installed, and other factors.

<sup>4</sup> Extended length extension tubes are packaged separately.

<sup>5</sup> The actual, precise fan weight will vary based on individual component weights and finishing.

<sup>6</sup> Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.

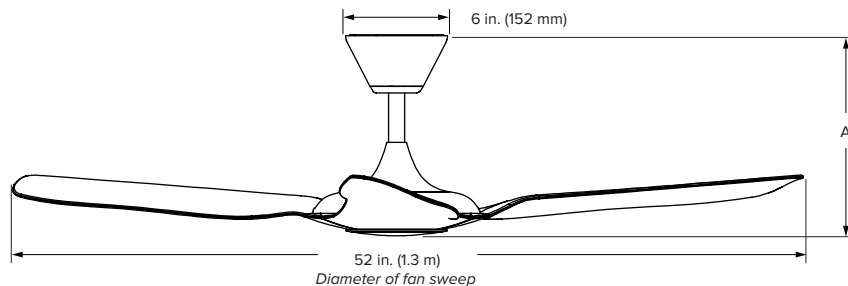

Lead times may vary.  
See warranty for coverage information.  
Specifications subject to change without notice.



AMERICAS  
HAIKUHOME.COM  
855-694-2458

CANADA  
HAIKUHOME.COM/CA  
844-924-4277

AUSTRALIA  
HAIKUHOME.COM/AU  
1-300-244-277

SINGAPORE  
HAIKUHOME.COM/SG  
+65 6709 8500

MALAYSIA  
+603 5565 0888