

Haiku Luxe Series Fans


TECHNICAL SPECIFICATIONS



Elevate your style and comfort with Haiku Luxe Series fans. Available in a variety of bold finishes, these fans establish a new standard for quality, design, technology, and convenience.

QUALITY, ELEGANCE, AND EFFICIENCY

- **Airfoils** — Aircraft-grade aluminum; 52-inch (1.3-meter) diameter
- **Finishes** — Brushed or polished metal or powder coat
- **Motor** — EC motor with digital inverter drive
- **Controls** — Remote control, Haiku Home mobile app¹, Haiku Wall Control (optional), or Amazon Alexa-enabled devices (optional).
- **Onboard Sensors** — Ambient and surface temperature, relative humidity, and passive infrared sensors enable SenseME[®] technology.
- **Environment** — Indoor or covered outdoor use
- **Operational Temperature and Humidity Range** — 32° to 104° F (0° to 40° C); 20% to 90% non-condensing
- **Accessories** — Haiku Light Kit, 0–10 V Module, and Haiku Wall Control. See respective spec sheets for details. A Tall Ceiling Kit and Stabilizer Kit are available for ceilings 14 feet (4.3 m) or taller.

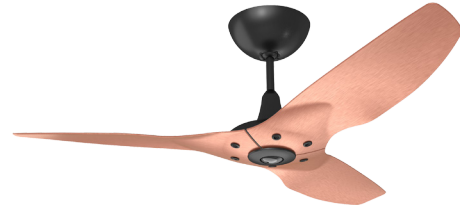

Handheld Remote

Airfoil Finishes



Hardware Finishes



*Available with black (AB) or white (AW) hardware finish.

**Powder coat. Available with hardware in same finish (AS or AO).

Technical Specifications — Universal Mount




Model number ²		S3127-X2-AX-XX-02-C-01-FXXX		
Optional Included	Extension tube lengths	7 in. (178 mm)	20 in. (508 mm)	32 in. (813 mm)
	Height (A)	16 in. (406 mm)	29 in. (737 mm)	41 in. (1041 mm)
Optional	Tall ceiling tube lengths ³	48 in. (1219 mm)		60 in. (1524 mm)
	Height (A)	57 in. (1448 mm)		69 in. (1753 mm)
Weight ⁴		15.5 lb (7 kg)		
Operating voltage		100–240 VAC, 1 Φ, 50–60 Hz		
Watts (min/max)		2.36/21.42 W		
Amps (min/max)		0.04/0.185 A		
Fan speed (min/max)		7 speeds (48.5/200 RPM)		
Sound level at max speed ⁵		< 35 dBA		

Technical Specifications — Standard Mount

Model number ²		S3127-A2-AX-XX-02-C-01-FXXX		
Weight ⁴		16.5 lb (7.5 kg)		
Operating voltage		100–240 VAC, 1 Φ, 50–60 Hz		
Watts (min/max)		2.27/18.14 W		
Amps (min/max)		0.04/0.16 A		
Fan speed (min/max)		7 speeds (48.5/200 RPM)		
Sound level at max speed ⁵		< 35 dBA		

Technical Specifications — Low Profile Mount

Model number ²		S3127-S0-AX-XX-02-C-01-FXXX		
Weight ⁴		16.5 lb (7.5 kg)		
Operating voltage		100–240 VAC, 1 Φ, 50–60 Hz		
Watts (min/max)		2.21/14.81 W		
Amps (min/max)		0.039/0.24 A		
Fan speed (min/max)		7 speeds (48.5/177 RPM)		
Sound level at max speed ⁵		< 35 dBA		

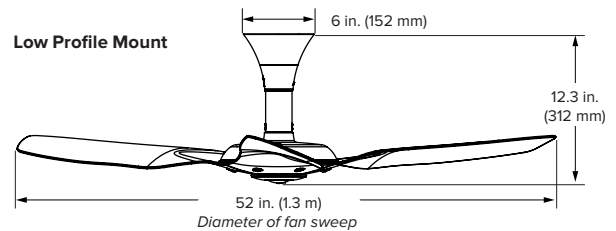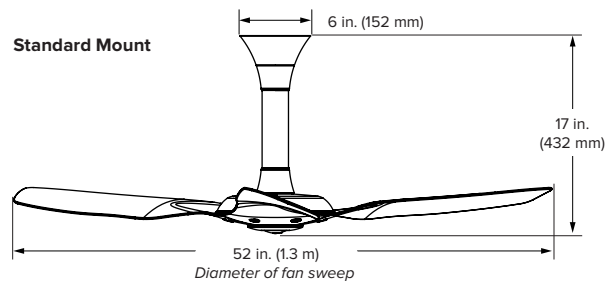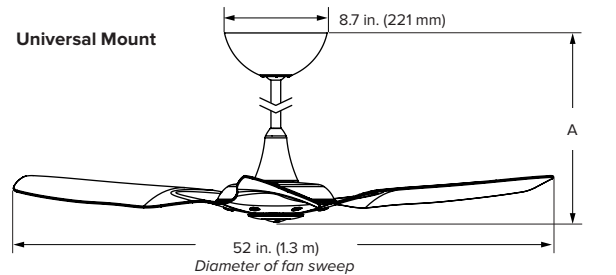

¹ SenseME Technology and the Haiku Home app are supported by Android[™] and iOS[™]. All specifications are subject to change without notice.

² "X" indicates a placeholder number, which varies depending on finish options, where the fan is installed, and other factors.

³ Optional Tall Ceiling Kit packaged separately.

⁴ The actual, precise fan weight will vary based on individual component weights and finishing.

⁵ Actual results of sound measurements in the field may vary due to sound reflective surfaces and environmental conditions.



Lead times may vary.
See warranty for coverage information.
Specifications subject to change without notice.
Fan heights do not include the Haiku Fan Light Kit.



AMERICAS
HAIKUHOME.COM
855-694-2458

CANADA
HAIKUHOME.COM/CA
844-924-4277

AUSTRALIA
HAIKUHOME.COM/AU
1-300-244-277

SINGAPORE
HAIKUHOME.COM/SG
+65 6709 8500

MALAYSIA
+603 5565 0888